

EXHIBIT 5-C
Specifications on EcoloBlue Models







EcoloBlue 30™





ECOLOBLUE 30 SERIES

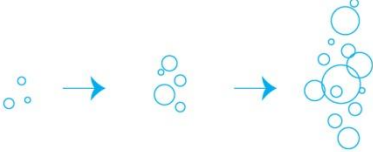

FEATURES

 <p>Water from Air Carbonated option</p>	 <p>LCD touchscreen interface for ultra-specific control</p>
<ul style="list-style-type: none">• Cleans air, reduces humidity• Easy tank/filter access• Larger water storage tank	<ul style="list-style-type: none">• Total temperature control• Auto shut-off• 110V AC & 220V AC
 <p>100% biodegradable packaging</p>	 <p>Low power consumption</p>


SEAMLESS POWER INTEGRATION

 <p>12v DC Inverters</p>	 <p>Portable Generators</p>
 <p>Solar Panels</p>	 <p>Wind Turbines</p>

ECOLOBLUE 26, 30 & 30s

- Up to 30 Liters every day
- 12 Stage filtration
- Only 280 Watts
- Solar compatible
- ROHS certified
- Alkaline option

AVAILABLE COLORS

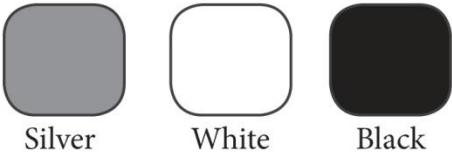

DIMENSIONS

The EcoloBlue™

- weighs approximately 110lbs (49kg)
- 44" tall (111cm)
- 18" wide (45cm)
- 17" deep (43cm)

ECOLOBLUE 26	\$1199.00 USD
ECOLOBLUE 30	\$1399.00 USD
ECOLOBLUE 30s	\$1699.00 USD

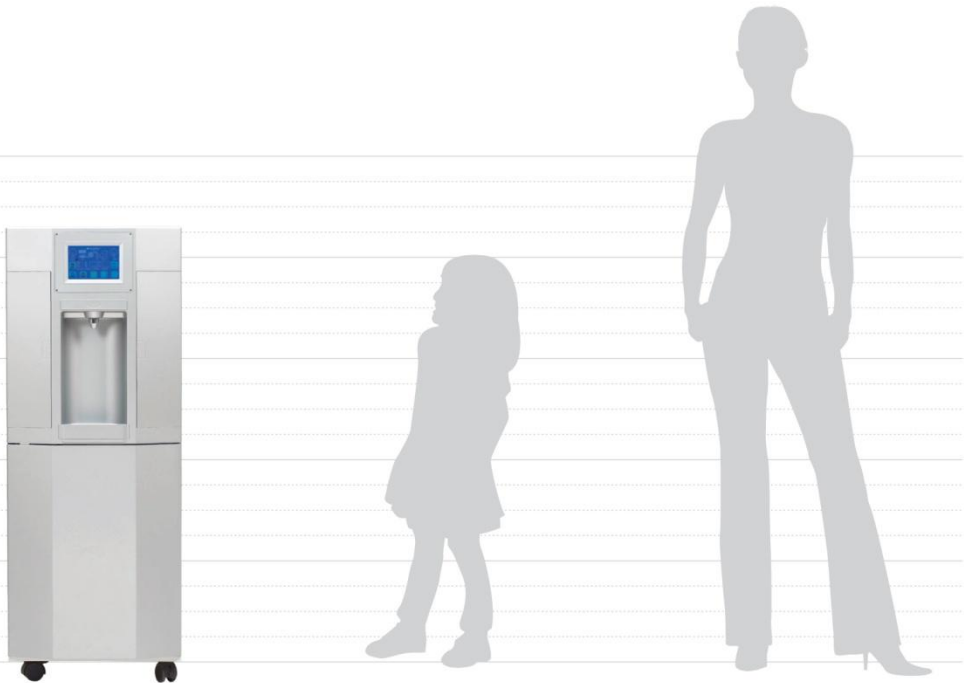


EXHIBIT 5-C
Specifications on EcoloBlue Models

ECOLOBLUE 1000 INDUSTRIAL

	EcoloBlue 1000 with Storage Tank	EcoloBlue 1000 without Storage Tank
Liters per day	1000 (30°C/80%HR)	1000 (30°C/80%HR)
Electrical Requirements	380V/50Hz 3Phase	380V/50Hz 3Phase
Input Power (Kw)	22	22
Compressors (Kw)	9.8 x 2pcs	9.8 x 2pcs
Refrigerant	R134A	R134A
Temperature °C	10-38	10-38
Humidity (%)	35-90	35-90
Collection Tank (L)	90	90
Storage Tank (L)	820	---
Weight (Kg)	1250	1250
Size (L x W x H)	3.7 x 1.0 x 1.6	2.5 x 1.0 x 1.6
Liters per KWh	0.528	0.528
Price USD	\$63,400	\$57,500



ECOLOBLUE 250 & 550 INDUSTRIAL

Without Holding Tank	EcoloBlue 250	EcoloBlue 550
Liters per day	250 (30°C/80%HR)	550(30°C/80%HR)
Electrical Requirements	380V/50Hz 3Phase	380V/50Hz 3Phase
Input Power (Kw)	4.5	130
Compressors (Kw)	3.75	30 x 4pcs
Refrigerant	R404A	R134A
Temperature °C	10-38	10-38
Humidity (%)	35-90	35-90
Collection Tank (L)	150	300
Storage Tank (L)	---	---
Weight (Kg)	330	580
Size (L x W x H)	1.6x 0.65x 1.3	2.35 x 0.85 x 1.5
Liters per KWh	0.54	0.552
Price USD	\$12,750	\$23,750
700 L Stainless Steel Holding Tank	\$5900	\$5900

ECOLOBLUE 3000 & 6000 INDUSTRIAL

Without Holding Tank	EcoloBlue 3000	EcoloBlue 6000
Liters per day	3000 (30°C/80%HR)	6000 (30°C/80%HR)
Electrical Requirements	380V/50Hz 3Phase	380V/50Hz 3Phase
Input Power (Kw)	80	130
Compressors (Kw)	37 x 2pcs	30 x 4pcs
Refrigerant	R404A	R404A
Temperature °C	10-38	10-38
Humidity (%)	35-90	35-90
Collection Tank (L)	120	120
Storage Tank (L)	---	---
Weight (Kg)	3800	4400
Size (L x W x H)	8.5 x 1.8 x 1.8	8.5 x 2.0 x 2.0
Liters per KWh	0.48	0.528
Price USD	\$101,500	\$240,000
700 L Stainless Steel Holding Tank	\$5900	\$5900